




ModEvo Tension Control Brake



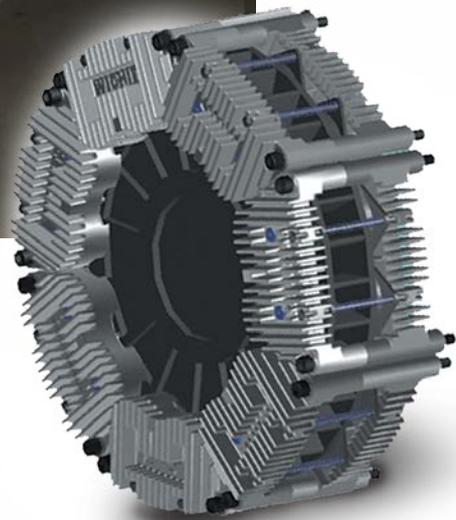


ModEvo Tension Control Brake

Versatile, cost-effective performance

The name for Wichita's ModEvo tension control brake is derived from 'modular' and 'evolutionary', terms that describe it perfectly. Modular - because braking systems to suit diverse tensioning applications can be assembled from a minimal number of modules common to the entire ModEvo range. Evolutionary - because continuous development of new materials, improved design and manufacturing techniques have enabled Wichita to develop ModEvo to match all customers' tension needs at affordable cost.

The advantages of the new ModEvo brake lie in the versatility of the modular system, ensuring that the requirements of a wide range of printing and converting unwind tension applications can be met from just a handful of parts common to the ModEvo range. This in turn brings cost benefits, as users can choose just the options they require and add to or upgrade these as their needs change, while carrying a minimum of spare parts.

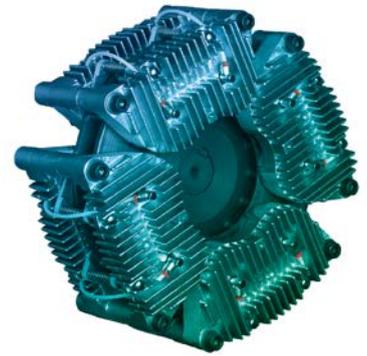



Actuator Options

More force, no loss of torque precision

Newly developed rolling diaphragm actuators are used in ModEvo, producing more force than previous designs to allow higher torque ratings. However, the sensitivity for which rolling diaphragms are favoured is not compromised.

Three actuator options are available, offering clamping forces of 100%, 60% or 25%.

The finned, die-cast aluminium brake module is common to all brake disc diameters. Each module uses two pairs of actuators, and allows friction pads to be changed quickly without dismantling the module.

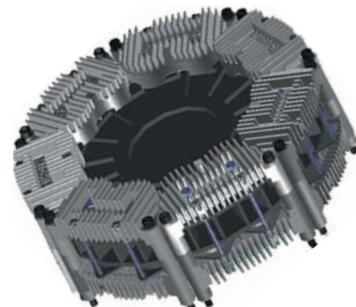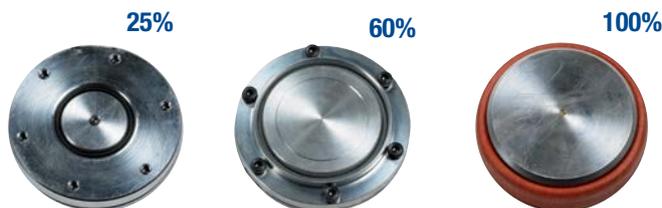



Brake Discs and Cooling

Strong, light and efficient

The ModEvo brake disc was developed at the Bedford, UK factory using Finite Element Analysis techniques to ensure maximum strength with minimum weight. The design is optimised to make best use of the cooling air available at slow speeds, and being bi-directional, it achieves high heat dissipation capacity in either rotational direction, unlike some other brakes. An optional electric cooling fan is available where space is limited or more extreme heat handling is required. Available in five sizes: 250mm, 300mm, 350mm, 400mm and 450mm diameters, all discs are the same thickness and use the same brake modules and actuators. Each disc can be specified with a minimum of a single module, up to the maximum number of modules that can be fitted around the disc – 7 in the case of the 450mm disc. This allows torque handling capabilities ranging from a maximum of 1026 Nm (9080 lbf.in) for the 250mm disc, up to 4935 Nm (43650 lbf.in) for the 450mm disc.



ModEvo with fan installed



450mm



400mm



350mm



300mm



250mm

Heat Capacity For Effective Cooling Speeds: kW					Max Speed rpm ⁽²⁾	Inertia (J) kgm ² Rotating Parts	Weight kg	
200rpm	300rpm	400rpm	500rpm	600rpm			Total	Rotating
No Fan					2250	0.060	12.4	8.7
1.9	2.4	2.7	3.0	3.2			13.2	
With Electric cooling fan							17.6	
3.8	4.0	4.0	4.0	4.0			22.1	
No Fan					1900	0.125	17.3	13.6
3.0	3.5	4.0	4.5	5.0			18.1	
With Electric cooling fan							22.5	
5.0	5.0	5.5	6.0	6.0			27.0	
No Fan					1650	0.23	24.8	20.3
4.2	4.8	5.5	6.6	7.2			29.2	
With Electric cooling fan							33.7	
6.5	6.5	6.5	6.5	6.5			38.2	
No Fan					1450	0.4	42.7	26.8
5.4	6.0	6.8	7.8	8.4			31.3	
With Electric cooling fan							35.7	
8.7	9.3	10.0	10.0	10.0			40.2	
No Fan					1250	0.61	44.7	33
6.1	7.0	7.8	9.2	10.0			49.2	
With Electric cooling fan							53.6	
10.0	10.8	11.6	12.5	13.3			37.5	
							41.9	
							46.4	
							50.9	
							55.4	
							59.8	
							64.3	

ModEvo Dimensions Table					
øA - Disc Size	250	300	350	400	450
øB - Overall	324	369	415	461	508
øC - Bolt P.C.D	298.5	343.5	389	435.5	482.5
øD - Clearance Dia.	90	140	190	240	290
U - As cast bore	25	25	25	25	25
Max. Bore	55	79	117	136	154
Z" - Angular Position	120°	90°	72°	60°	51.4°
Max. No. Of Brake Modules	3	4	5	6	7
Wichita. Generic	73125-000	73130-000	73141-000	73141-000	73145-000

- (1) Min torque listed is with standard friction coefficient. Values in (brackets) are with a single actuator.
- (2) Max speed is with standard brake disc. A high speed brake disc capable of 50% higher speed is also available. All torque values are obtained based on Wichita's new ModEvo Rolling Diaphragm Actuators. Smaller area (60% and 25%) rolling Diaphragm actuators are also available for lower torque requirements.

Single Actuator ModEvo Tension Brake

For lighter tension duties

The name “ModEvo” comes from Wichita’s ‘modular’ – ‘evolutionary’ design of tension brake. The original ModEvo tension brake was launched in 2000 and has been highly successful in the global tension market. Wichita is now happy to extend the successful ModEvo range to include the single actuator ModEvo. Designed for lighter tension duties, the single actuator unit is available with all of the same options as the dual acting unit. We believe it offers our customers even greater flexibility in their applications. With the added benefit of lower cost, we expect this unit to be a great success in the tension market, whilst maintaining the high Wichita quality standards.



Performance

MODEL	Torque (Nm) universal friction		Heat Capacity For Effective Cooling Speeds: kW						Max Speed rpm ⁽¹⁾	Inertia (J) kgm ² Rotating Parts	Weight kg		
	Min 0.2 bar	Max 6 bar	50rpm	100rpm	200rpm	300rpm	400rpm	500rpm			600rpm	Total	Rotating
250/1	4	119	No Fan						2250	0.060	12.0	10.0	
			1.2	1.4	1.9	2.4	2.5	2.5					2.5
			With Electric Cooling Fan (150 mm) ⁽⁴⁾										
			2.8	2.8	2.8	2.8	2.8	2.8	2.8				
300/1	5	149	No Fan						1900	0.128	16.3	14.3	
			2.1	2.4	2.5	2.5	2.5	2.5					2.5
			With Electric Cooling Fan (150 mm) ⁽⁴⁾										
			2.8	2.8	2.8	2.8	2.8	2.8	2.8				
350/1	6	180	No Fan						1650	0.226	23.3	21.3	
			2.5	2.5	2.5	2.5	2.5	2.5					2.5
			With Electric Cooling Fan (150 mm) ⁽⁴⁾										
			2.8	2.8	2.8	2.8	2.8	2.8	2.8				
400/1	7	213	No Fan						1450	0.383	30.0	27.9	
			2.5	2.5	2.5	2.5	2.5	2.5					2.5
			With Electric Cooling Fan (200 mm) ⁽⁴⁾										
			2.8	2.8	2.8	2.8	2.8	2.8	2.8				
450/1	8	245	No Fan						1250	0.587	36.6	34.6	
			2.5	2.5	2.5	2.5	2.5	2.5					2.5
			With Electric Cooling Fan (250 mm) ⁽⁴⁾										
			2.8	2.8	2.8	2.8	2.8	2.8	2.8				

(1) Max speed is with standard brake disc. A high speed disc capable of 50% higher speed is available (derate heat by 10%)

All torque values are obtained based on Wichita’s new ModEvo Rolling Diaphragm Actuators
Smaller area (60% and 25%) Rolling Diaphragm actuators are also available for lower torque requirements

Limit to 2.5 kw/ actuator (normal) or 2.8 kw/ actuator (fan cooled)

Genuine Replacement Parts

Longer Life

We have years of experience in building value into every Genuine Wichita Replacement Part. Our parts, made with quality materials and leading-edge technology, not only last longer than the competition, resulting in lower life cycle costs, they also fit precisely to give you the assurance of trouble-free performance. That's why we can confidently offer you the very best warranty in the business.

Faster Delivery

To help you lessen downtime problems, we've recently established new methods and procedures that will get Genuine Replacement Parts to you quicker than ever before. We've improved order processing, increased manufacturing capacities and added to our nationwide network of distributors. Many of our parts can now be shipped within 24 hours of your order or are available off-the-shelf from your local distributor. You don't have to pay a premium price for all the product and service advantages of Genuine Wichita Replacement Parts. You'll find our prices to be very competitive with any of the companies offering imitation replacement parts.

Warranty

When you specify Genuine Replacement Parts from Wichita you automatically expect more...and get more. Especially better performance, longer life and the peace of mind that comes with knowing you are working with the industry's proven leader. To further back up our quality commitment to you, we now offer a new three-year warranty on our line of replacement air tubes*, and a two-year warranty on all other components**. That's unmatched by anyone in our industry...and for good reason.

Air Tubes

- Wear resistance polymers insure compatibility with other Wichita parts
- Consistent size allows ease of replacement if required
- Low air volume construction reduces needless use of compressed air
- Combination of space-age fibers and elastomers give extended life and retention of size and fit



Friction Discs

- Special high strength materials with molded composite teeth resist functional wear and provide additional output torque
- Exactly match the mating Wichita component for consistent and maximum high torque output
- High heat resistance to combat unforeseen application problems
- Consistent size for ease of replacement
- Air grooves provide cooling and longer life



For assistance, please call
1-800-964-3262

For after hours emergency service,
call 1-940-631-4595.

Wichita Clutch Facilities

North America

USA

2800 Fisher Road
Wichita Falls, TX 76302 - USA
940-723-3400

*Pneumatic Clutches
and Brakes*

Europe

United Kingdom

Amphill Road
Bedford MK42 9RD - England
+44 (0) 1234 350311

*Pneumatic Clutches
and Brakes*

Asia Pacific

Australia

+61 2 9894 0133

China

+86 21 5169-9255

Hong Kong

+852 2615 9313

Singapore

+65 6487 4464

Taiwan

+886 2 2577 8156

Thailand

+66 2322 5527

The Brands of Altra Motion

Couplings

Ameridrives
www.ameridrives.com

Bibby Turboflex
www.bibbyturboflex.com

Guardian Couplings
www.guardiancouplings.com

Huco
www.huco.com

Lamiflex Couplings
www.lamiflexcouplings.com

Stromag
www.stromag.com

TB Wood's
www.tbwoods.com

Linear Systems

Thomson
www.thomsonlinear.com

Warner Linear
www.warnerlinear.com

Geared Cam Limit Switches

Stromag
www.stromag.com

Engineered Bearing Assemblies

Kilian
www.kilianbearings.com

Electric Clutches & Brakes

Matrix
www.matrix-international.com

Stromag
www.stromag.com

Warner Electric
www.warnerelectric.com

Deltran
www.thomsonlinear.com

Belted Drives

TB Wood's
www.tbwoods.com

Heavy Duty Clutches & Brakes

Twiflex
www.twiflex.com

Stromag
www.stromag.com

Svendborg Brakes
www.svendborg-brakes.com

Wichita Clutch
www.wichitaclutch.com

Gearing & Specialty Components

Bauer Gear Motor
www.bauergears.com

Boston Gear
www.bostongear.com

Delevan
www.delevan.com

Delroyd Worm Gear
www.delroyd.com

Nuttall Gear
www.nuttallgear.com

Engine Braking Systems

Jacobs Vehicle Systems
www.jacobsvehiclesystems.com

Precision Motors & Automation

Kollmorgen
www.kollmorgen.com

Miniature Motors

Portescap
www.portescap.com

Overrunning Clutches

Formsprag Clutch
www.formsprag.com

Marland Clutch
www.marland.com

Stieber
www.stieberclutch.com

Neither the accuracy nor completeness of the information contained in this publication is guaranteed by the company and may be subject to change in its sole discretion. The operating and performance characteristics of these products may vary depending on the application, installation, operating conditions and environmental factors. The company's terms and conditions of sale can be viewed at <http://www.altramotion.com/terms-and-conditions/sales-terms-and-conditions>. These terms and conditions apply to any person who may buy, acquire or use a product referred to herein, including any person who buys from a licensed distributor of these branded products.

©2019 by Wichita Clutch LLC. All rights reserved. All trademarks in this publication are the sole and exclusive property of Wichita Clutch LLC or one of its affiliated companies.